


FESTSTEHENDE PRÄZISIONS-ZENTRIERSPITZE PRECISION DEAD CENTER

**508
EX**

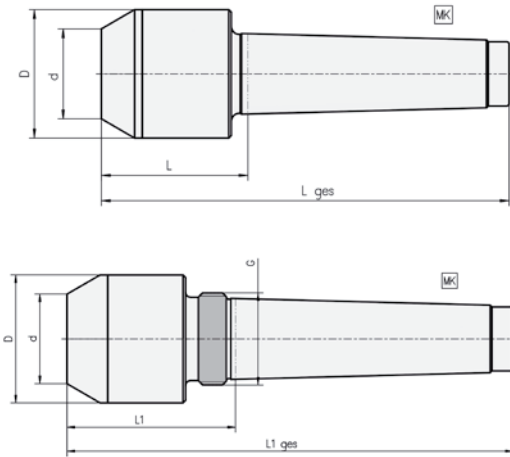

| Type | MK | D | d | d1 | Lges | L1ges | L | L1 | Type | MK | D | d | d1 | Lges | L1ges | L | L1 |
|---|----|----|----|-------|------|-------|----|----|----------------------|----|----|----|-------|------|-------|---|----|
| Type | MT | D | d | d1 | Lges | L1ges | L | L1 | Type | MT | D | d | d1 | Lges | L1ges | L | L1 |
| 538 EX 2540 | 3 | 40 | 25 | 23,38 | 125 | | 44 | | 548 EX 2540 | 4 | 40 | 25 | 31,27 | 160 | | | 57 |
| 3550 | 3 | 50 | 35 | 23,38 | 125 | | 44 | | 3550 | 4 | 50 | 35 | 31,27 | 160 | | | 57 |
| 4560 | 3 | 60 | 45 | 23,38 | 125 | | 44 | | 4560 | 4 | 60 | 45 | 31,27 | 160 | | | 57 |
| 5570 | 3 | 70 | 55 | 23,38 | 125 | | 44 | | 5570 | 4 | 70 | 55 | 31,27 | 160 | | | 57 |
| | | | | | | | | | 6580 | 4 | 80 | 65 | 31,27 | 160 | | | 57 |
| Ausführung mit Abdrückgewinde Version with draw-off thread | | | | | | | | | | | | | | | | | |
| 538 AG EX 2540 | 3 | 40 | 25 | 23,38 | | 138 | | 57 | 548 AGEX 2540 | 4 | 40 | 25 | 31,27 | | 175 | | 72 |
| 3550 | 3 | 50 | 35 | 23,38 | | 138 | | 57 | 3550 | 4 | 50 | 35 | 31,27 | | 175 | | 72 |
| 4560 | 3 | 60 | 45 | 23,38 | | 138 | | 57 | 4560 | 4 | 60 | 45 | 31,27 | | 175 | | 72 |
| 5570 | 3 | 70 | 55 | 23,38 | | 138 | | 57 | 5570 | 4 | 70 | 55 | 31,27 | | 175 | | 72 |
| | | | | | | | | | 6580 | 4 | 80 | 65 | 31,27 | | 175 | | 72 |

Produkteigenschaften

- ▶ HM-Werkzeuge zur Schleifbearbeitung hochpräziser Bauteile mit großen Zentren
- ▶ Rundheit an der 60°-Spitze < 0,001 mm
- ▶ Feinkörniges Hartmetall für hohe Verschleißfestigkeit
- ▶ Hohe Oberflächengüte am Schaft für optimalen Sitz in der Pinole
- ▶ Abdrückmuttern bitte extra bestellen

Product features

- ▶ Carbide tools for grinding high precision components with big diameter centers
- ▶ Roundness of 60° tip < 0.001 mm
- ▶ Fine grained carbide for resistance to wear and tear
- ▶ High surface quality of shank for optimum seating
- ▶ Please order draw-off nuts separately